


include/beecrypt/aesopt.h

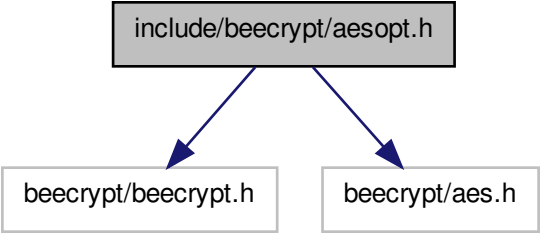

```
graph TD; A[include/beecrypt/aesopt.h] --> B[beecrypt/beecrypt.h]; A --> C[beecrypt/aes.h];
```

The diagram illustrates a header file dependency. At the top, a grey box contains the text 'include/beecrypt/aesopt.h'. Two blue arrows point downwards from the bottom of this box to two separate white boxes below. The left white box contains 'beecrypt/beecrypt.h' and the right white box contains 'beecrypt/aes.h'. This represents the 'include/beecrypt/aesopt.h' file including both 'beecrypt/beecrypt.h' and 'beecrypt/aes.h'.

beecrypt/beecrypt.h

beecrypt/aes.h