


include/beecrypt/blowfish.h

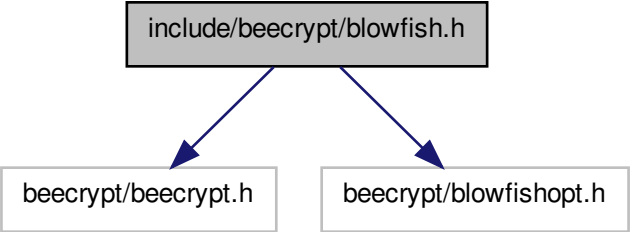

```
graph TD; A[include/beecrypt/blowfish.h] --> B[beecrypt/beecrypt.h]; A --> C[beecrypt/blowfishopt.h];
```

The diagram illustrates a header file dependency. A central box at the top, labeled 'include/beecrypt/blowfish.h', has two blue arrows pointing downwards to two separate boxes. The left box is labeled 'beecrypt/beecrypt.h' and the right box is labeled 'beecrypt/blowfishopt.h'. All boxes have a light gray background and a thin black border.

beecrypt/beecrypt.h

beecrypt/blowfishopt.h