


include/beecrypt/blowfishopt.h

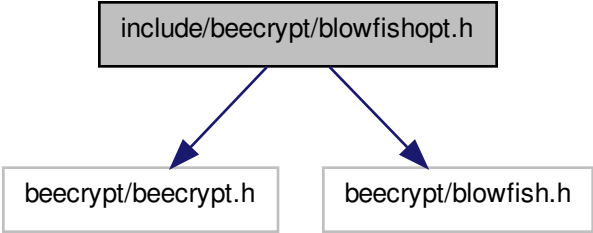

```
graph TD; A[include/beecrypt/blowfishopt.h] --> B[beecrypt/beecrypt.h]; A --> C[beecrypt/blowfish.h];
```

The diagram illustrates a header file dependency. A central box at the top, labeled 'include/beecrypt/blowfishopt.h', has two blue arrows pointing downwards to two separate boxes below it. The left box is labeled 'beecrypt/beecrypt.h' and the right box is labeled 'beecrypt/blowfish.h'. This indicates that 'include/beecrypt/blowfishopt.h' includes both 'beecrypt/beecrypt.h' and 'beecrypt/blowfish.h'.

beecrypt/beecrypt.h

beecrypt/blowfish.h