


include/beecrypt/dhies.h

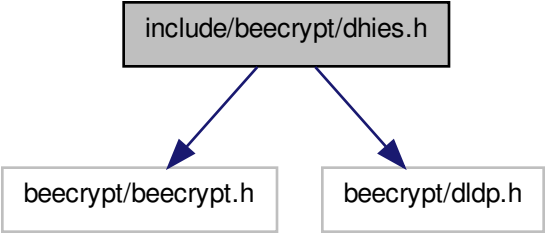

```
graph TD; A[include/beecrypt/dhies.h] --> B[beecrypt/beecrypt.h]; A --> C[beecrypt/dldp.h];
```

The diagram illustrates a header file dependency. At the top, a grey rectangular box contains the text 'include/beecrypt/dhies.h'. Two blue arrows originate from the bottom edge of this box. The left arrow points to a white rectangular box containing 'beecrypt/beecrypt.h'. The right arrow points to another white rectangular box containing 'beecrypt/dldp.h'. All boxes have a thin black border.

beecrypt/beecrypt.h

beecrypt/dldp.h