


include/beecrypt/mp.h

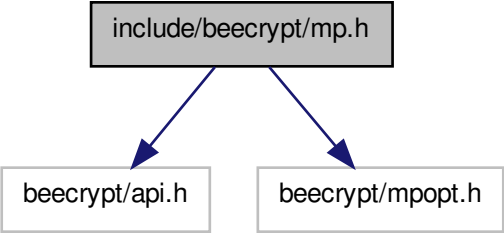

```
graph TD; A[include/beecrypt/mp.h] --> B[beecrypt/api.h]; A --> C[beecrypt/mpopt.h];
```

The diagram illustrates a header file dependency. At the top, a gray box labeled 'include/beecrypt/mp.h' has two blue arrows pointing downwards to two white boxes. The left box is labeled 'beecrypt/api.h' and the right box is labeled 'beecrypt/mpopt.h'. This indicates that 'include/beecrypt/mp.h' includes both 'beecrypt/api.h' and 'beecrypt/mpopt.h'.

beecrypt/api.h

beecrypt/mpopt.h